


**Product Information Bulletin**

As part of RYCO's continuous improvement initiative, this product information bulletin is an amendment to the Maximum Working Pressure and Minimum Burst Pressure information previously published in the RYCO 2013 Product Technical Manual - Hydraulics.

**RQP1**  
HIGH TEMPERATURE  
MULTI FLUID  
ONE WIRE BRAID HOSE

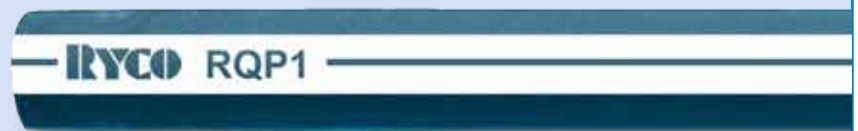

RQP1 - SURVIVOR NON-SKIVE HOSE																	
PART NO	HOSE SIZE		NOMINAL HOSE ID		NOMINAL HOSE OD		MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE		MINIMUM BEND RADIUS		AVERAGE WEIGHT		COUPLING SERIES		
	DN	Dash	mm	inch	mm	inch	bar	psi	bar	psi	mm	inch	kg/m	lb/ft	ONE PIECE	FIELD ATT	
<b>Hose</b>	<b>DN</b>	<b>Dash</b>	<b>mm</b>	<b>inch</b>	<b>mm</b>	<b>inch</b>	<b>bar</b>	<b>psi</b>	<b>bar</b>	<b>psi</b>	<b>mm</b>	<b>inch</b>	<b>kg/m</b>	<b>lb/ft</b>	<b>NON-SKIVE</b>		
<b>RQP14</b>	6	-04	6,4	1/4	13,4	0.53	225	3250	900	13000	100	4.0	0,24	0.16	T2000		6000 (K000)
<b>RQP15</b>	8	-05	7,9	5/16	15,0	0.59	215	3120	860	12500	114	4.5	0,27	0.18	T2000		
<b>RQP16</b>	10	-06	9,5	3/8	17,4	0.69	180	2600	720	10400	127	5.0	0,34	0.23	T2000	T7000	6000 (K000)
<b>RQP18</b>	12	-08	12,7	1/2	20,5	0.81	160	2300	640	9300	178	7.0	0,44	0.30	T2000	T7000	6000 (K000)
<b>RQP110</b>	16	-10	15,9	5/8	23,7	0.93	130	1880	520	7540	200	8.0	0,51	0.34	T2000	T7000	6000 (K000)
<b>RQP112</b>	19	-12	19,1	3/4	27,6	1.09	120	1740	480	7000	240	9.5	0,64	0.43	T2000	T7000	6000 (K000)
<b>RQP116</b>	25	-16	25,4	1	35,7	1.41	90	1300	360	5200	300	12.0	0,98	0.66	T2000	T7000	6000 (K000)

For additional information please contact RYCO Product Management or your local RYCO representative.

**RYCO AUSTRALIA**

P: +61 3 9680 8000  
E: Product@RYCO.com.au

**RYCO NEW ZEALAND**

P: +64 9 573 2680  
E: Product@RYCO.com.au

**RYCO UNITED KINGDOM**

P: +44 (0) 1926 423 408  
E: Product@RYCO.com.au

**RYCO SOUTH AFRICA**

P: +27 10 4100 500  
E: Product@RYCO.com.au


[www.RYCO.com.au](http://www.RYCO.com.au)

All Rights Reserved  
Copyright: July 2015  
Released: July 2015