



Lloyd's
Register

Type Approval Certificate Extension

This is to certify that **Certificate No.08/10096 (E3)** for the undernoted product(s) has/have been extended and renumbered in accordance with the relevant requirements of the Lloyd's Register Type Approval System.

This certificate is issued to:

PRODUCER	RYCO Hydraulics.
PLACE OF PRODUCTION	RYCO Hydraulics Pty. Ltd. 99 Calarco Drive, Derrimut, Victoria, 3026 Australia RYCO Hydraulics Sdn. Bhd. Plot 207, Kuala Ketil Industrial Estate, 09300 Kuala Ketil, Kedah Darulaman, Malaysia RYCO Hydraulics (Dalian) Ltd. 38 Ying Ri Road, Ying Cheng Zi Industrial Zone, Gan Jing Zi District, Dalian 116036 China
DESCRIPTION	Flexible Hoses of Non-Metallic Material with Permanently Fitted Couplings, Designations: Suction SR, Defiant SRF, Textile M2
TYPE	SAE 100R4, SAE 100R3, SRX
APPLICATION	For use on ships and offshore installations classed with Lloyd's Register, as short lengths in systems of fresh and seawater, petroleum and water based hydraulics.
STANDARD	Part 5, Chapter 12 of Lloyd's Register's Rules and Regulations for the
Certificate No.	08/10096 (E4)
Issue Date	27 December 2018
Expiry Date	26 December 2023
Sheet	1 of 4



Chng Teck Wee
South Asia Technical Support Office
Lloyd's Register Singapore Pte. Ltd.

Lloyd's Register Asia
2 Science Park Drive, #02-05/06 Ascent, Singapore 118222

Lloyd's Register Group Limited its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.



Classification of Ships (July, 2013)

Part 5, Chapter 10 of Lloyd's Register's Rules and Regulations for the Classification of Mobile Offshore Units (September 1996 plus Notices Nos. 1, 2, 3, 4, 5 & 6 as applicable)

Fire Resistant Testing according to ISO 15540/15541

RATINGS

Sizes: DN 6 to DN 76

Maximum Working Pressure: 3.9 to 88 bar (see below)

Service Temperature: -40°C to +100°C (see below)

Coupling Material: Carbon Steel AISI/
Stainless Steel (Option)

Electroplated Fe/Zn12c acc. to AS1789

OTHER CONDITIONS

The hoses may be used for the following working conditions

XTREME SRX	DN (mm)	Max. Pressure (bar)
SRX12	19	21
SRX16	25	17
SRX20	31	14
SRX24	38	11
SRX32	51	7
SRX40	63	4
SRX48	76	4
Temperature Range: -40°C to +100°C		


SUCTION SR	DN (mm)	Max. Pressure (bar)
SR12	19	21
SR16	25	17
SR40	63	4.3
SR48	76	3.9
Temperature Range: -40°C to +100°C		

Certificate No. 08/10096 (E4)

Issue Date 27 December 2018

Expiry Date 26 December 2023

Sheet 2 of 4

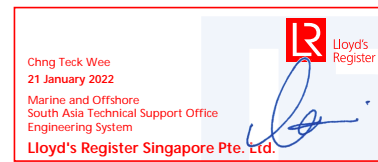

Chng Teck Wee
South Asia Technical Support Office
Lloyd's Register Singapore Pte. Ltd.

Lloyd's Register Asia
2 Science Park Drive, #02-05/06 Ascent, Singapore 118222

Lloyd's Register Group Limited its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.



DEFIANT SRF	DN (mm)	Max. Pressure (bar)
SRF12	19	21
SRF16	25	17
SRF20	31	14
SRF24	38	11
SRF32	51	7
Temperature Range: -40°C to +100°C		

TEXTILE M2	DN (mm)	Max. Pressure (bar)
M24	6	88
M26	10	78
M28	12	70
M212	19	52
Temperature Range: -40°C to +100°C		

In the case of seawater systems, where failure of the hoses could give rise to the danger of flooding, the hoses are to be suitably enclosed.

Hose clamps are to be restricted to the engine cooling water system, where the hose consists of a short straight length joining two metal pipes, between two fixed points.

Carbon steel couplings are to be normalised for temperatures below -10°C.

In all cases the hoses are to be installed in accordance with the manufacturer's instructions and tested to the satisfaction of the attending surveyor.

Certificate No. 08/10096 (E4)
Issue Date 27 December 2018
Expiry Date 26 December 2023
Sheet 3 of 4



Chng Teck Wee
South Asia Technical Support Office
Lloyd's Register Singapore Pte. Ltd.

Lloyd's Register Asia
2 Science Park Drive, #02-05/06 Ascent, Singapore 118222




Lloyd's
Register

"This Certificate is not valid for equipment, the design, ratings or operating parameters of which have been varied from the specimen tested. The manufacturer should notify Lloyd's Register Singapore Pte. Ltd. of any modification or changes to the equipment in order to obtain a valid certificate."

*The **Design Appraisal Document No. 08/10096(E4)** and its supplementary Type Approval Terms and Conditions form part of this Certificate.*

All other details remain as the previous **Certificate No. 08/10096(E3)** to which this extension should be attached.

Certificate No.	08/10096 (E4)
Issue Date	27 December 2018
Expiry Date	26 December 2023
Sheet	4 of 4

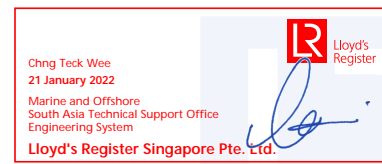

Chng Teck Wee
South Asia Technical Support Office
Lloyd's Register Singapore Pte. Ltd.

*Lloyd's Register Asia
2 Science Park Drive, #02-05/06 Ascent, Singapore 118222*

Lloyd's Register Group Limited its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.