

# RYCO®

## JSEAL™


The Standard in JIC Fittings



STRONGER CONNECTIONS.  
SMARTER SOLUTIONS.

[www.ryco-hydraulics.com](http://www.ryco-hydraulics.com)

# THE STANDARD IN JIC STANDARDS

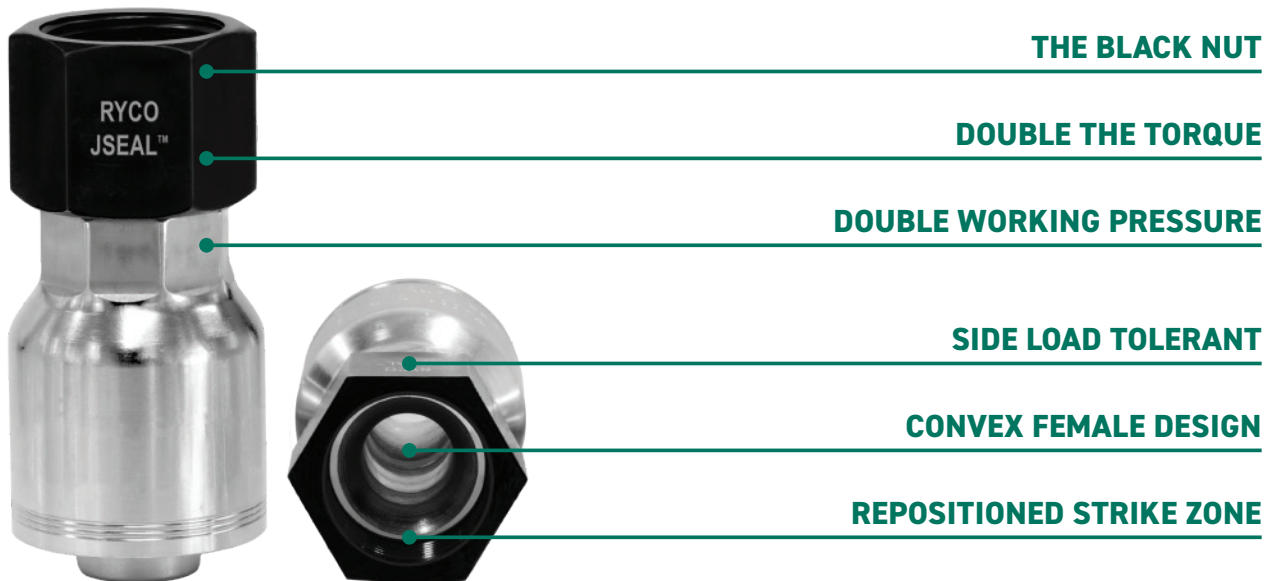

## FEATURES & BENEFITS:


LEAK FREE	NO SWEATING	NO WEEPING	NO STRETCHING
INTERCHANGABLE WITH JIC	EASIER INSTALLATIONS	EASIER CONNECTIONS	
NO EQUIPMENT MODIFICATIONS NEEDED	EXCELLENT VIBRATION RESISTANCE		

## EXPECT SAVINGS ON:

✓ LABOUR	✓ WARRANTY CLAIMS	✓ PART REPLACEMENTS
----------	-------------------	---------------------

## INCREASED EFFICIENCY

Ryco Hydraulics' **JSEAL™** means increased efficiency, improved productivity, unparalleled reliability, and ongoing cost effectiveness.

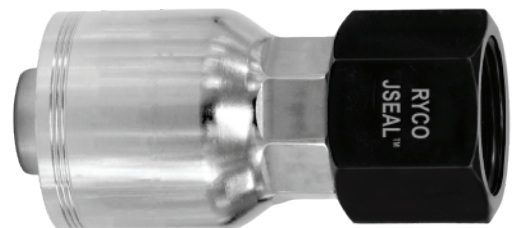

# DOUBLE THE WORKING PRESURE



Ryco Hydraulics' **JSEAL™** provides up to double the working pressure of standard JIC connections.

**JSEAL™** performance is equal to or better than ORFS (O-Ring Face Seal).

## RYCO JSEAL™ ASSEMBLY SPECIFICATIONS:

RYCO JSEAL™ SIZE			RYCO JSEAL™ SPECIFICATIONS	
THREAD SIZE	TUBE SIZE	DASH SIZE	MAXIMUM WORKING PRESSURE	RECOMMENDED TORQUE SETTINGS
inch	inch		bar	Nm
7/16	1/4	-07	700	23
9/16	3/8	-09	700	39
3/4	1/2	-12	630	77
7/8	5/8	-14	630	142
1.1/16	3/4	-17	560	198
1.3/16	7/8	-19	490	235
1.5/16	1	-21	420	263
1.5/8	1.1/4	-26	420	309
1.7/8	1.1/2	-30	350	386
2.1	2	-40	280	597

Note: JSEAL 2" (-40) has a 3.5:1 safety factor.



**DISCLAIMER:** We reserve the right to modify our products and/or related services and/or discontinue the manufacture and/or supply of any of the products and/or related services, without notice. This document supersedes all previous versions and previously issued documentation. The only official source of technical crimping parameters regarding our products is our Digital Crimp Tools. Printed copies are uncontrolled therefore, please be sure to use the latest versions of our Ryco [Crimp App](#) or [Crimp Web Tool](#). Don't mix and match: always use Ryco original hoses and fittings. For more information, see our [Safety Guide](#).

# RYCO®



SCAN HERE FOR  
CONTACT INFORMATION